


00773200 - 2-3/8" FLOOR SLEEVE

FOR MOVABLE OR FLOATING TYPE FLOORS


PORTER
 WWW.PORTERATHLETIC.COM/FACILITY

VOLLEYBALL SPECIFICATION SHEET

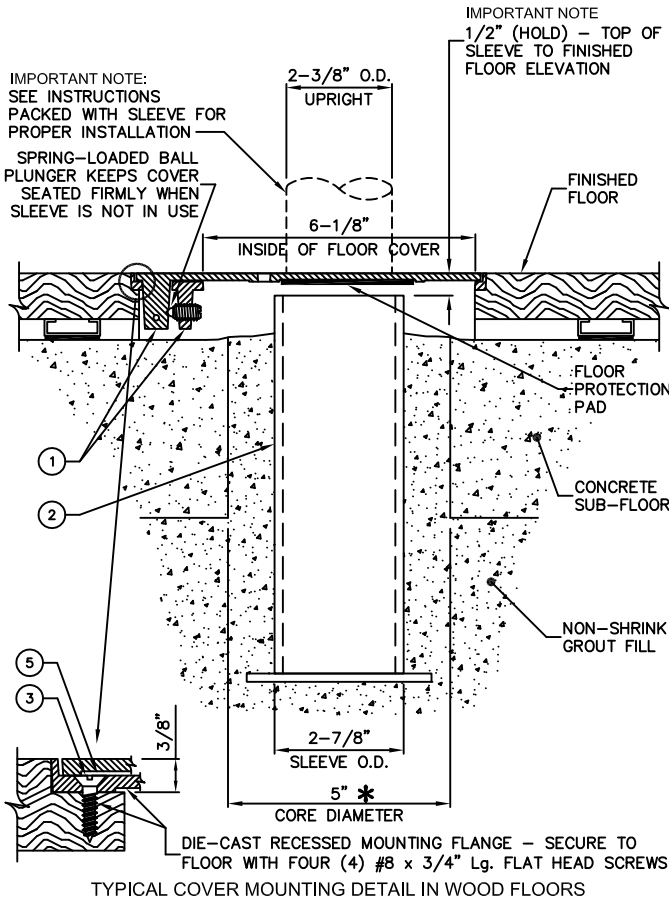


TYPICAL COVER MOUNTING DETAIL IN WOOD FLOORS


PARTS LIST		
No.	QTY.	DESCRIPTION
1	1	COVR 00048 OBO COVER PLATE ASSEMBLY
2	1	SLVE 00085 002 2-3/8" SLEEVE WELDMENT
3	4	HDWE 06100 OEO #8 x 3/4" Lg. WOOD SCREW
4	1	HDWE 58131 OEO COVER REMOVAL TOOL
5	1	MISC 00126 000 VINYL STRIP

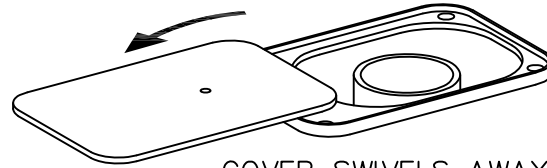

COVER SWIVELS AWAY FROM SLEEVE OPENING

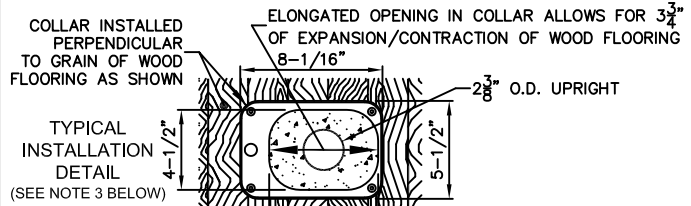

TYPICAL INSTALLATION DETAIL (SEE NOTE 3 BELOW)

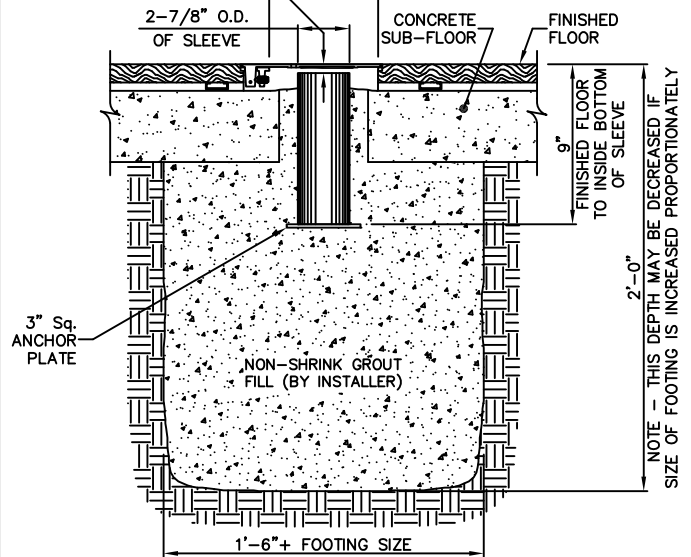

INSTALLATION OPTIONS (COMPLETE INSTALLATION INSTRUCTIONS ARE INCLUDED WITH FLOOR SLEEVE.)

- *1. LOCATE AND CORE 5" DIA. HOLES IN SLAB, AND GROUT SLEEVES IN PLACE PER DETAIL ABOVE. CAUTION - BEFORE CORING HOLES IN EXISTING CONCRETE SLAB, CHECK FOR LOCATIONS OF ELECTRICAL CONDUIT OR PIPE.
- 2. LOCATE SLEEVES AND POUR IN PLACE IN CONCRETE SLAB.

— 00773-200 2-3/8" Dia. FLOOR SLEEVE WITH STAINLESS STEEL COVER PLATE

PORTER[®]

888-277-7778 PORTER@PORTERATHLETIC.COM
 © COPYRIGHT 2012 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER

PROJECT NAME

G-773

11/8/2013

00773200 - 2-3/8" FLOOR SLEEVE

FOR MOVABLE OR FLOATING TYPE FLOORS

SPECIFICATIONS

PORTER No. 00773-200 GYMNASIUM FLOOR SLEEVE FOR 2-3/8" (6.0cm) O.D. VOLLEYBALL / TENNIS STANDARDS

Sleeve/cover assembly shall be designed for use in movable/floating type wood flooring systems to allow for seasonal expansion or contraction of the floor.

Floor sleeve cover assembly shall consist of a flush type mounting frame with an integral cover plate which is secured flush in the playing floor by means of a special, adjustable-type, snap-in latch mechanism. Cover shall be equipped with a heavy-duty, swivel-type retainer to prevent theft. Vinyl strip shall be provided between cover plate and flush mounting frame to eliminate vibration or undue sound from a ball impact. Cover to be furnished with a special cover removal key to prevent use by unauthorized individuals. Cover assembly shall be secured to the wood floor with four (4) concealed wood screws. Floor sleeve cover assembly shall be 5-1/2" (14.0cm) x 8" (20.3cm) x 3/8" (9.5mm) deep with in internal slot to allow a maximum of 3-3/4" (9.5cm) of floor movement.

Sleeve assembly shall be 2-7/8" (7.3cm) O.D. heavy wall steel tubing extending 9" (22.9cm) into concrete footing. Bottom of sleeve shall be capped with a 3" (7.6cm) square steel plate to provide proper anchorage in footing. Sleeve assembly to be finished in a rust resistant enamel finish. Floor sleeve system is designed for installation after finished wood flooring is in place.

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

VOLLEYBALL SPECIFICATION SHEET

G-773