


# 90215-000 - WALL MOUNTED BACKSTOP

## WINDOW-SPAN WALL MOUNTED BACKSTOP WITH RECTANGULAR BACKBOARD - 4'-0" TO 10'-0" EXTENSION

SUPPORT CHAINS MAY BE SECURED TO THE STRUCTURE. SPECIFY TYPE, HEIGHT AND LOCATION OF FRAMING WHEN ORDERED.

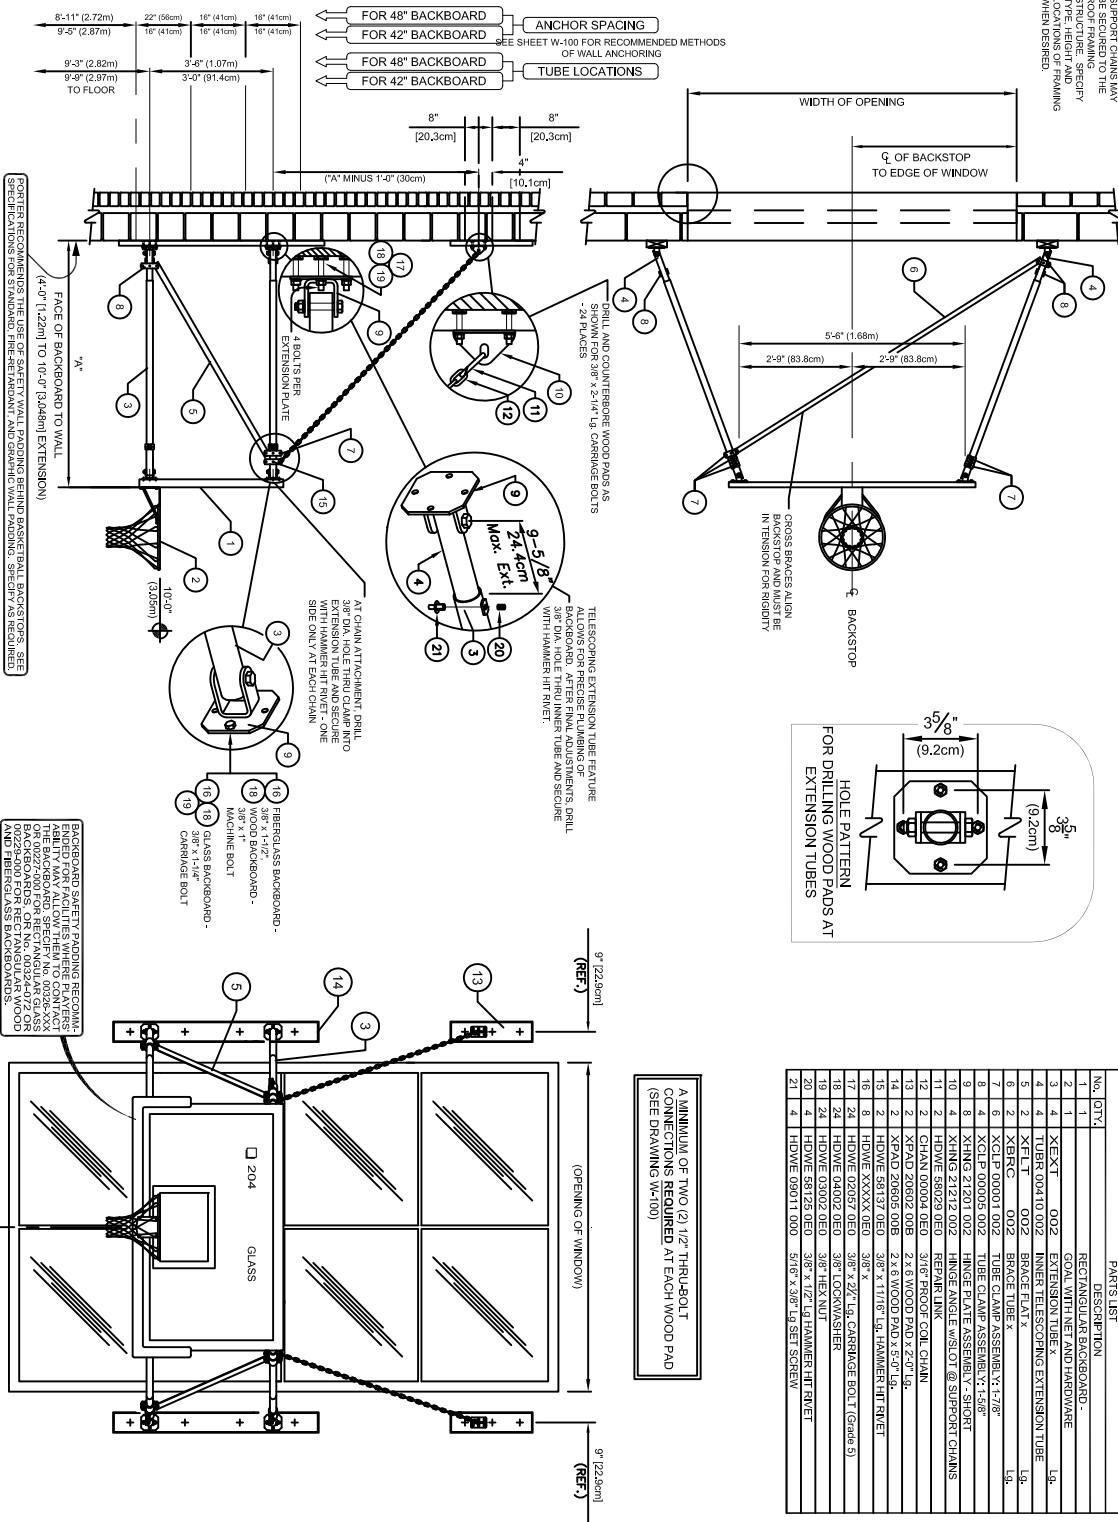

REQUIRED - SPECIFY BACKBOARD No.

AND GOAL No.

# 90215-000 - WALL MOUNTED BACKSTOP

WINDOW-SPAN WALL MOUNTED BACKSTOP WITH  
RECTANGULAR BACKBOARD - 4'-0" TO 10'-0" EXTENSION

## SPECIFICATIONS

### PORTER No. 90215- WINDOW-SPAN WALL-MOUNTED BACKSTOP WITH FAN BACKBOARD

Backstop shall be wall-mounted stationary type with face of backboard extended 4'-0" to 10'-0" from supporting wall. Specify extension.

Extension frames shall be fabricated of four (4) 1-7/8" O.D. tubes with a telescoping end section for ease of installation, and precise plumbing and alignment of backboard with official court markings, even when supported on uneven wall conditions. Ends of telescoping extension frame assemblies shall be drilled and bolted to hinge plate assemblies for attachment to the backside of the backboard and to the wall pads. Hinge plate assemblies to straddle window opening and provide rigid installation of the extension frames.

Backstop shall be vertically braced with two (2) 7/8" steel tension braces attached at both ends with precision die-formed clamps and horizontally by two (2) 3/16" x 1-1/4" steel tension flats attached at both ends with precision die-formed clamps. Two (2) chain supports (3/16" proof coil chain) shall extend diagonally from the wall to the upper extension tubes, terminating in clamp-type fittings.

Southern yellow pine wall pads shall be provided at all wall attachment points. All edges shall be chamfered and pads shall be finished with two finish coats of natural gloss lacquer.

All metal parts shall be painted one (1) coat of flat black enamel. (If special painting of colors is required, specify final painting by painting contractor.)

Specify backboard and goal as required.